

HDMI 4K 1-4

Video Splitter



Specifications

Document Version : V1.0.0.0

Introduction

The HDMI 4K 1-4 is a 4K video splitter with outstanding performance, excellent stability and high definition.

This splitter supports 1x HDMI 2.0 input and 4x HDMI 2.0 real-time outputs. The resolutions of both its input and outputs can be up to 4Kx2K@60Hz. The input and output resolutions are the same.

This splitter is easy to use and supports plug and play. It is applicable to any devices with HDMI connectors and supports various set-top boxes, DVD players, player boxes and so on.

Features

- Supports input and output resolutions up to 4Kx2K@60Hz.
- Features the same timing of the input and output with up to Ultra HD 4K resolution.
- Supports 3D video source input.
- Supports up to 4:4:4 10-bit input.
- OLED display can display the input and output statuses in real time.
- Supports three EDID setting methods: standard, custom and EDID learning.
- Supports HDCP.
- Supports plug and play of both input and output, with no drivers required.
- Adopts metal heatsink design.
- Supports program update using a USB drive.
- Supports various certifications, such as RoHS.

Appearance



Button	Description
Enter	Enter the menu and confirm the operation.
Back	Exit the current operation.
OLED display	Display the current device status and menu items.
▲	Move the cursor up.
▼	Move the cursor down.
HDMI Input	
Quantity	1

Standard	HDMI 2.0 connector supports HDCP 2.2 and HDCP 1.4.
Resolution	1024×768@30/48/50/56/60/72/75/85/Hz 1280×720@24/25/30/48/50/56/60/72/75/85/Hz 1280×1024@24/25/30/48/50/56/60/72/75/85/Hz 1366×768@24/25/30/48/50/56/60/72/75/85/Hz 1440×900@24/25/30/48/50/56/60/72/75/85/Hz 1536×768@24/25/30/48/50/56/60/72/75/85/Hz 1600×1200@24/25/30/48/50/56/60/72/75/85/Hz 1920×1080@24/25/30/48/50/56/60/72/75/85/Hz 1920×1200@24/25/30/48/50/56/60/72/75/85/Hz 2048×1080@24/25/30/48/50/56/60/72/75/85/Hz 2560×1080@24/25/30/48/50/56/60/72/75/85/Hz 2560×1600@24/25/30/48/50/56/60/72/75/85/Hz 3840×1080@24/25/30/48/50/56/60/72/75/85/Hz 3840×2160@24/25/30/48/50/56/60Hz
HDMI Output	
Quantity	4
Standard	HDMI 2.0 connector supports HDCP 2.2 and HDCP 1.4.
Resolution	1024×768@30/48/50/56/60/72/75/85/Hz 1280×720@24/25/30/48/50/56/60/72/75/85/Hz 1280×1024@24/25/30/48/50/56/60/72/75/85/Hz 1366×768@24/25/30/48/50/56/60/72/75/85/Hz 1440×900@24/25/30/48/50/56/60/72/75/85/Hz 1536×768@24/25/30/48/50/56/60/72/75/85/Hz 1600×1200@24/25/30/48/50/56/60/72/75/85/Hz 1920×1080@24/25/30/48/50/56/60/72/75/85/Hz 1920×1200@24/25/30/48/50/56/60/72/75/85/Hz 2048×1080@24/25/30/48/50/56/60/72/75/85/Hz 2560×1080@24/25/30/48/50/56/60/72/75/85/Hz 2560×1600@24/25/30/48/50/56/60/72/75/85/Hz 3840×1080@24/25/30/48/50/56/60/72/75/85/Hz 3840×2160@24/25/30/48/50/56/60Hz
Control	
USB	Connect to the control computer for program update.
Overall Specifications	
Power supply	DC 12 V


Power consumption	2 W
Operating temperature	0°C to +50°C
Storage temperature	-10°C to +60°C
Operating humidity	10% RH to 90% RH, non-condensing
Dimensions	185.0 mm × 118.1 mm × 28.9 mm
Package dimensions	357 mm × 264 mm × 85 mm
Material	Metal
Net weight	470 g

Note:


The data is tested by the Pixelhue Technology Ltd lab. The test data may differ due to the influence of environment and cable material, and the actual working environment shall prevail. The specifications of Ethernet cable and video cable used by the lab test are as follows.

Video cable: 28AWG core



The positive and negative terminals of the power supply are as follows.

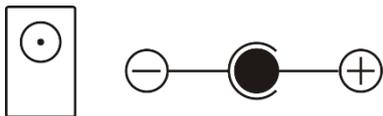

Applications

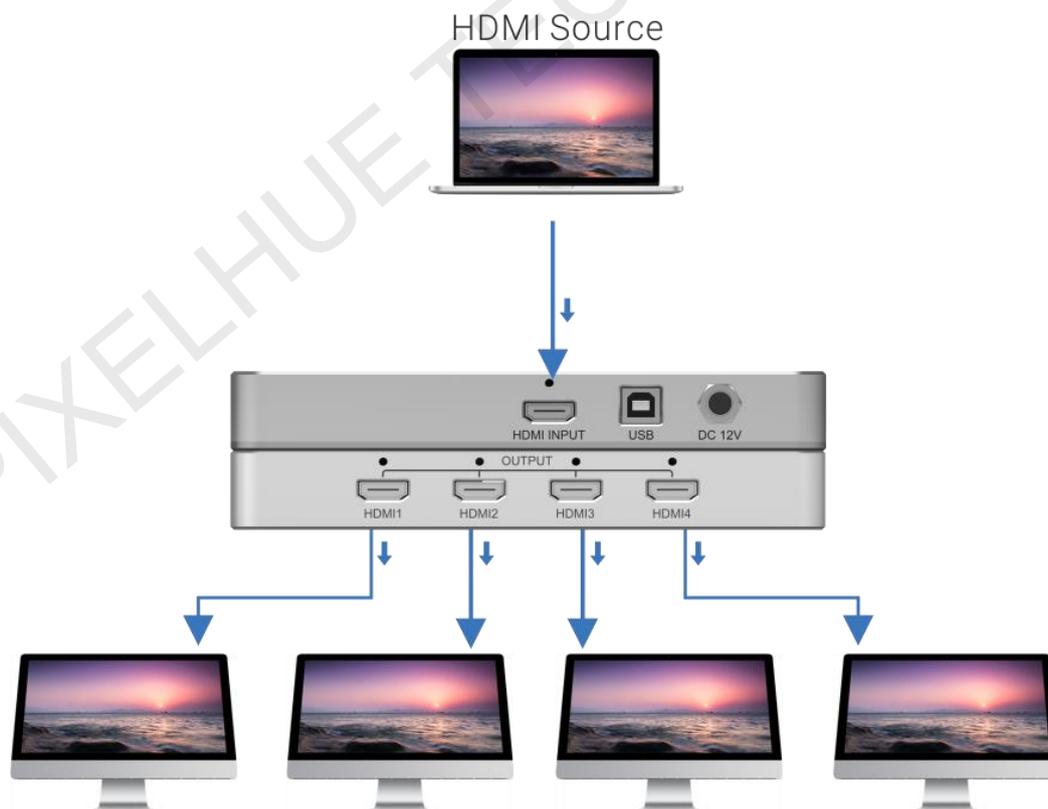

Dimensions

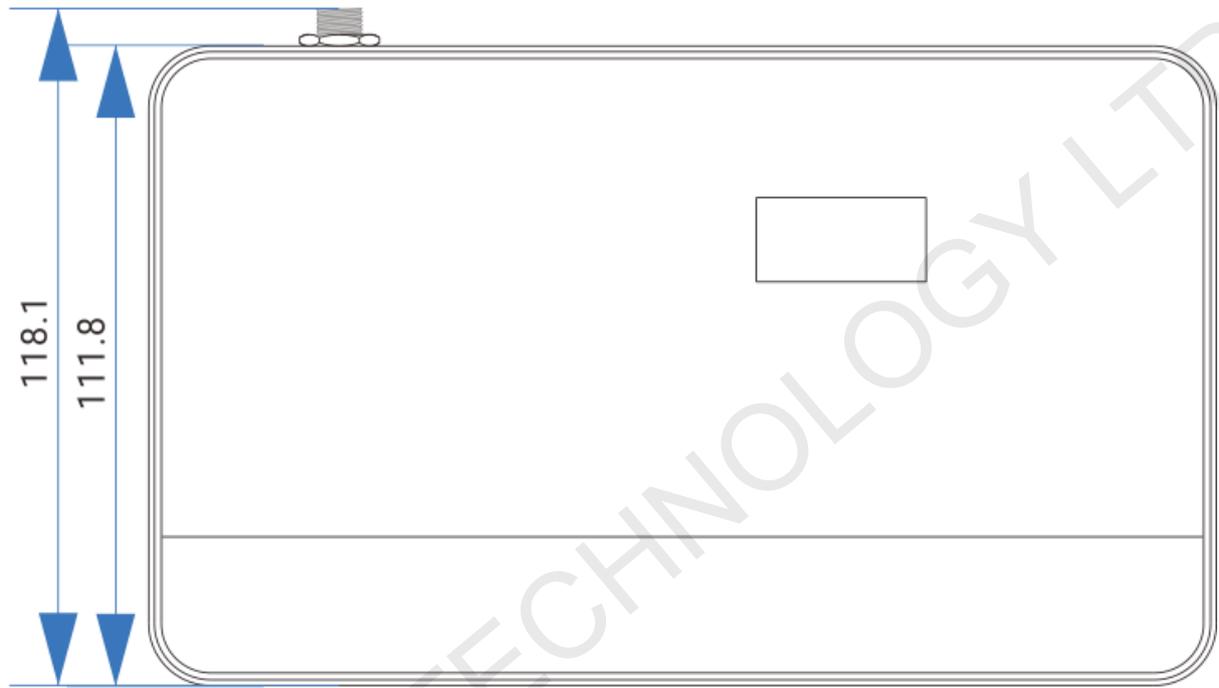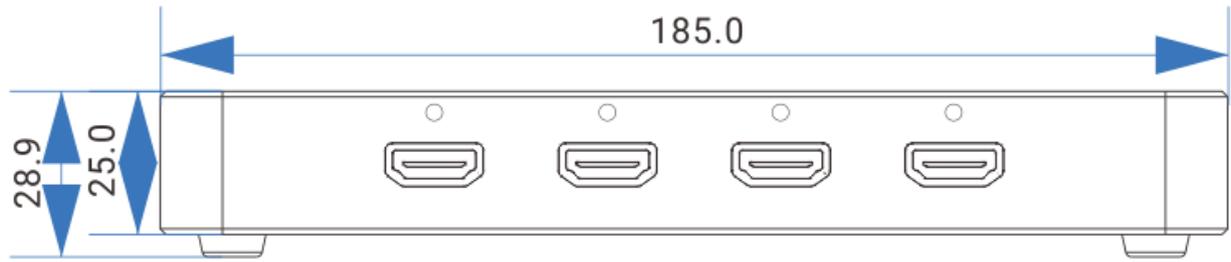

185.0

Tolerance: ± 0.3 Unit: mm

Copyright © 2020 Pixelhue Technology Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Pixelhue Technology Ltd.

Trademark

 **PIXELHUE** is a trademark of Pixelhue Technology Ltd.

Statement

Thank you for choosing the product of Pixelhue Technology Ltd. This document is intended to help you understand and use the product. For accuracy and reliability, Pixelhue Technology Ltd may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

PIXELHUE TECHNOLOGY LTD